


E-Crane[®] Capacity Charts

MH1200 Series (Metric)

Model MH11290CR-D
PD-E

Model MH10317CR-D
PD-E



E-Crane[®] Capacity Charts
Material Handlers MH1200 Series
Model MH10317

CONTENTS

MH10317CR-D MATERIAL HANDLER 3
 Rated Lift Capacity (Mton/m) 3


MH10317PD-E MATERIAL HANDLER 5
 Rated Lift Capacity (Mton/m) 5

MODEL MH10317 TECHNICAL SPECS 7



MH10317CR-D MATERIAL HANDLER

Rated Lift Capacity (Mton/m)

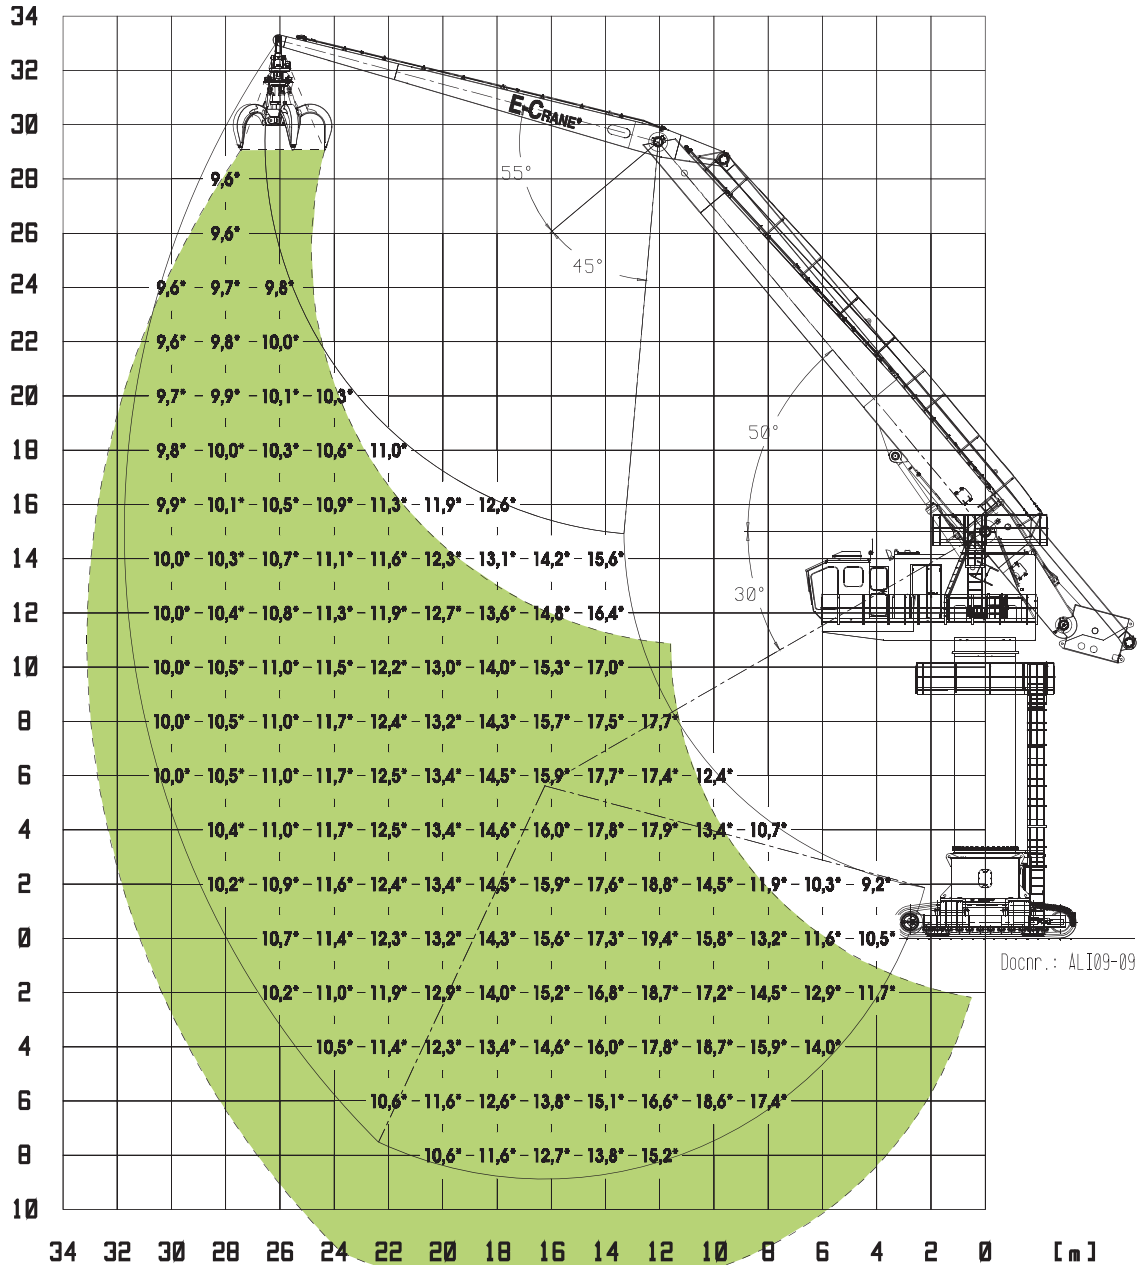

Lift Capacities are stated in metric tonnes (t) on the lifting gear's stick tip, and can be lifted 360° on firm, level supporting surface. The user shall make allowances for job conditions such as soft or uneven ground.

Lift Capacities shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities (indicated via *).
Lift Capacities apply only to the machine as originally manufactured and normally equipped by the manufacturer.
Lift Capacities are in compliance with ISO 10567:2007

The mass of slings and any auxiliary lifting devices shall be deducted from the rated load to determine the net load that may be lifted.

The operator should be fully acquainted with the operator's manual and the operating safety manual furnished by the manufacturer before operating the machine.

The total mass of the machine is 169000 kg. Included in this mass are 750mm double grouser shoes, 18,75m boom, 14,5m stick, 2,5m 51850 kg counterweight, all operating fluids and a 75 kg operator.

MH1200 Series Model 10317CR-D Material Handler, acc. ISO 10567:2007

R [m]	4	6	8	10	12	14	16	18	20	22	24	26	28	30	Load @max radius L [kg/R [m]]
H [m]															
32															9632*
30															9595*
28													9559*		9575*
26													9588*		9568*
24									9766*				9661*	9583*	9571*
22									9923*				9766*	9635*	9582*
20									10349*				9893*	9710*	9600*
18									10975*				10031*	9797*	9623*
16							12554*		11864*				10170*	9886*	9651*
14						15618*	14171*		12286*				10302*	9966*	9681*
12						16442*	14805*		12667*				10415*	10027*	9714*
10						17080*	15317*		12988*				10498*	10056*	9748*
8						17688*	15689*		13232*				10538*	10037*	9781*
6				12387*	17417*	17746*	15911*		13387*				10521*	9948*	9811*
4				10662*	13377*	17782*	15978*		13440*				10425*		9836*
2	9226*	10271*	11934*	14529*	18761*	17632*	15890*		13382*				10219*		9853*
0	10496*	11566*	13228*	15798*	19403*	17299*	15641*		13197*						9856*
-2	11702*	12828*	14544*	17183*	18716*	16775*	15221*		12867*						9838*
-4		14073*	15903*	18722*	17805*	16046*	14611*		12360*						9787*
-6			17358*	18582*	16641*	15081*	13775*		11624*						9686*
-8					15173*	13826*	12654*		10554*						9901*

NOTE:

Lift Capacities are stated in metric tonnes (t) on the lifting gear's stick tip, and can be lifted 360° on firm, level supporting surface. The user shall make allowances for job conditions such as soft or uneven ground.

Lift Capacities shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities (320 bar / 4640 psi) (indicated via *).

Lift Capacities apply only to the machine as originally manufactured and normally equipped by the manufacturer.

Lift Capacities are in compliance with ISO 10567:2007


The mass of slings and any auxiliary lifting devices shall be deducted from the rated load to determine the net load that may be lifted.

The operator should be fully acquainted with the operator's manual and the operating safety manual furnished by the manufacturer before operating the machine.

The total mass of the machine is 169000 kg. Included in this mass are 750mm double grouser shoes, 18,75m boom, 14,5m stick, 2,5m 51850 kg counterweight, all operating fluids and a 75 kg operator.

MH10317PD-E MATERIAL HANDLER

Rated Lift Capacity (Mton/m)

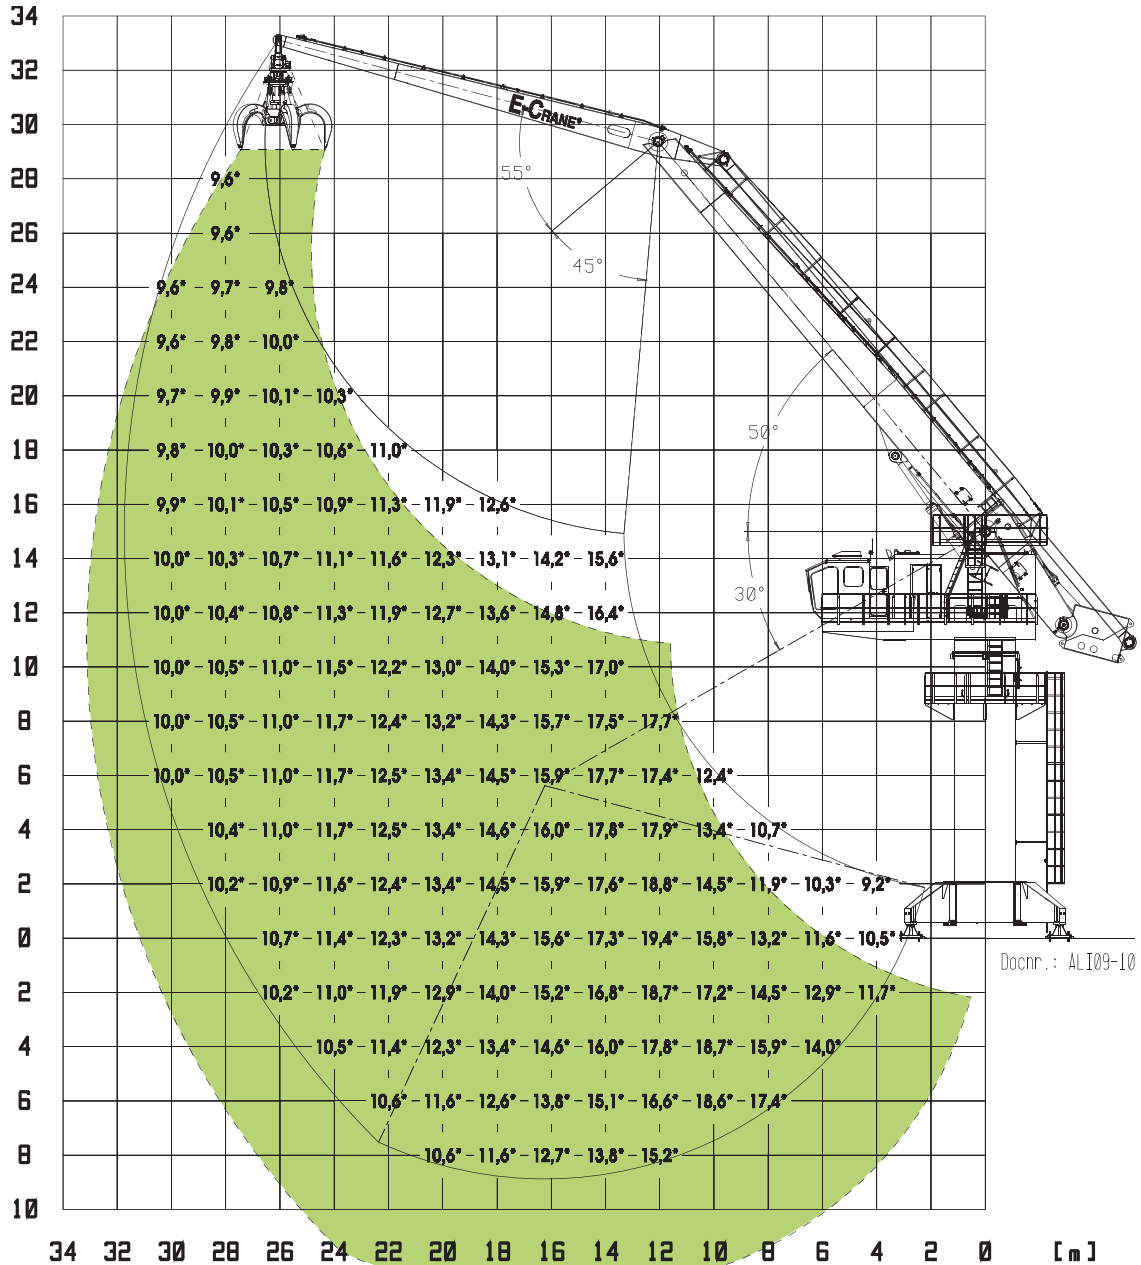

Lift Capacities are stated in metric tonnes (t) on the lifting gear's stick tip, and can be lifted 360° on firm, level supporting surface. The user shall make allowances for job conditions such as soft or uneven ground.

Lift Capacities shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities (indicated via *).
Lift Capacities apply only to the machine as originally manufactured and normally equipped by the manufacturer.
Lift Capacities are in compliance with ISO 10567:2007

The mass of slings and any auxiliary lifting devices shall be deducted from the rated load to determine the net load that may be lifted.

The operator should be fully acquainted with the operator's manual and the operating safety manual furnished by the manufacturer before operating the machine.

The total mass of the machine is 140000 kg. Included in this mass are upper revolving frame, pedestal, column, 18,75m boom, 14,5m stick, 2,5m 51850 kg counterweight, all operating fluids and a 75 kg operator.

MH1200 Series Model 10317PD-E Material Handler, acc. ISO 10567:2007																
R [m]	4	6	8	10	12	14	16	18	20	22	24	26	28	30	Load @max radius L [kg]R [m]	
H [m]																
32															9632*	26,8
30															9595*	28,0
28													9559*		9575*	29,0
26													9588*		9568*	29,8
24												9766*	9661*	9583*	9571*	30,4
22												9923*	9766*	9635*	9582*	31,0
20											10349*	10103*	9893*	9710*	9600*	31,3
18										10975*	10606*	10296*	10031*	9797*	9623*	31,6
16								12554*	11864*	11314*	10865*	10491*	10170*	9886*	9651*	31,7
14						15618*	14171*	13103*	12286*	11639*	11114*	10677*	10302*	9966*	9681*	31,7
12						16442*	14805*	13594*	12667*	11934*	11339*	10843*	10415*	10027*	9714*	31,6
10						17080*	15317*	14002*	12988*	12183*	11527*	10976*	10498*	10056*	9748*	31,3
8					17688*	17514*	15689*	14308*	13232*	12371*	11664*	11066*	10538*	10037*	9781*	31,0
6				12387*	17417*	17746*	15911*	14500*	13387*	12486*	11739*	11098*	10521*	9948*	9811*	30,4
4			10662*	13377*	17873*	17782*	15978*	14568*	13440*	12516*	11737*	11056*	10425*		9836*	29,8
2	9226*	10271*	11934*	14529*	18761*	17632*	15890*	14506*	13382*	12446*	11642*	10921*	10219*		9853*	29,0
0	10496*	11566*	13228*	15798*	19403*	17299*	15641*	14303*	13197*	12258*	11432*	10661*			9856*	28,0
-2	11702*	12828*	14544*	17183*	18716*	16775*	15221*	13944*	12867*	11929*	11072*	10217*			9838*	26,8
-4		14073*	15903*	18722*	17805*	16046*	14611*	13405*	12360*	11416*	10499*				9787*	25,4
-6			17358*	18582*	16641*	15081*	13775*	12645*	11624*	10643*					9686*	23,8
-8					15173*	13826*	12654*	11588*	10554*						9901*	21,2

NOTE:

Lift Capacities are stated in metric tonnes (t) on the lifting gear's stick tip, and can be lifted 360° on firm, level supporting surface. The user shall make allowances for job conditions such as soft or uneven ground.

Lift Capacities shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities (indicated via *).

Lift Capacities apply only to the machine as originally manufactured and normally equipped by the manufacturer.

Lift Capacities are in compliance with ISO 10567:2007

The mass of slings and any auxiliary lifting devices shall be deducted from the rated load to determine the net load that may be lifted.

The operator should be fully acquainted with the operator's manual and the operating safety manual furnished by the manufacturer before operating the machine.

The total mass of the machine is 140000 kg. Included in this mass are upper revolving frame, pedestal, column, 18,75m boom, 14,5m stick, 2,5m 51850 kg counterweight, all operating fluids and a 75 kg operator.

MODEL MH10317 TECHNICAL SPECS

	Specifications English (*)		Specifications Metric (*)	
Operating Range: (related to ground reference plane (GRP) +0 and centerline of rotation)				
Minimum Outreach Range (from centerline of rotation)	7'-3.7/8"		2,232 m	
Maximum Outreach (from centerline of rotation)	104'-1.1/2"		31,737 m	
Downreach Range (below GRP)	29'-1.7/16"		8,875 m	
Lifting Range (vertical lift)	108'-7.13/16"		33,116 m	
Boom Operating Angles (above and below horizontal)	+50°/-30°		+50°/-30°	
Stick Operating Angles (before and after vertical)	+55°/-45°		+55°/-45°	
Degrees of Rotation	360° continuous		360° continuous	
Main Hydr. & Elec. Specs:	CR-D	PD-E	CR-D	PD-E
Power Supply	-	3-Phase 480 Volts AC, 60 Hz	-	3-Phase 400 Volts AC, 50 Hz
Generator	300 kVA	-	300 kVA	-
Electrical Motor	200 hp	200 hp	160 kW	160 kW
Implement Pumps				
Max. Flow	211.3 gpm	211.3 gpm	800 l/min	800 l/min
Max. Working Circuit Pressure	4640 psi	4640 psi	320 bar	320 bar
Swing Pump				
Max. Flow	64.2 gpm	64.2 gpm	243 l/min	243 l/min
Max. Working Circuit Pressure	3844 psi	3844 psi	265 bar	265 bar
Hydraulic System Relief Setting	4650 psi	4650 psi	32.000 kPa	32.000 kPa
Hydraulic Tank Refill Capacity	489 USgal	489 USgal	1.850 l	1.850 l
Dimensions:				
Boom Length	61'-6.3/16"		18,75 m	
Stick Length	47'-6.7/8"		14,5 m	
Total Weight Superstructure**	250.800 lbs		114.000 kg	
Total Weight Model MH10317 as standard equipped	CR-D	PD-E	CR-D	PD-E
	371.800 lbs	308.000 lbs	169.000 kg	140.000 kg

(*) Materials and specifications are subject to change without notice.

See your E-Crane® dealer for available options.

(**) Operating weight does include lubricants, hydraulic oil and operator

©2009 E-Crane Worldwide / Indusign. All rights reserved. All technical specifications are subject to change without prior notice and without incurring responsibility for material handlers previously sold! Changes, errors and misprints reserved.